

# Chaos and multiple mode spatio-temporal complexity in thermo-visco-elastic systems subject to laser irradiation

O. Gottlieb and E. Hollander

Department of Mechanical Engineering, Technion - Israel Institute of Technology, Haifa 32000, Israel

A self-excited nonlinear dynamical system is one that, in the absence of external modulated forcing, will undergo bounded periodic limit-cycle oscillations beyond a stability threshold of an equilibrium state. Thermally driven limit-cycle oscillations have been shown to occur in mechanical systems that span multiple spatial scales. A large scale example is a space structure which absorbs solar radiation that can either increase or decrease as the structure bends towards or away from the incoming radiation. This consists of a feedback loop that can change the equilibrium configuration or can lead to self-excited bending vibrations. Additional examples include limit-cycle oscillations of a five cm long aluminum coated glass cantilever [1], and recently, various nano-resonators in the shape of disks, domes, paddles and wires [2]. The advantages of self-excited nano-electro-mechanical-systems include a dramatic improvement of the quality factor via parametric amplification, stability enhancement through the use of feedback, and incorporation of a single optical configuration for both drive and motion sensing. To date, these systems have been modeled by single-degree-of-freedom resonators coupled to a lumped-mass thermal description. However, while their analysis qualitatively reveals the onset of limit cycle oscillations, the analytically determined thresholds differ from measurements by a factor of two [2]. Furthermore, these systems have been shown experimentally to exhibit complex vibrations that alternate between several continuous vibration modes which cannot be explained by lumped-mass models [1].

Thus, in order to resolve the spatio-temporal complexity of the thermo-visco-elastic system response near primary, secondary and multiple internal resonances, we formulate an initial-boundary-value problem that consistently includes both nonlinear viscoelastic and thermal fields [3]. We determine the coupled thermo-elastic field basis functions and construct a low-order nonlinear multi-mode dynamical system for the experimental conditions (Fig. 1) defined by Hane in 1996 [1].

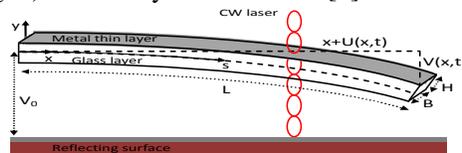


Figure 1: Definition sketch of the laser irradiation initial-boundary-value problem.

The resulting dynamical system truncated to cubic order, consistently incorporates the coupled thermo-visco-elastic equations [3] with the geometric stiffness and gyroscopic nonlinearities of a micro-cantilever developed for finite amplitude dynamics in atomic force microscopy [4]. The influence of the laser is embedded within the thermal field equation as the time-averaged absorption of a standing wave captured within a bi-material (the cantilever) and the mirror, creating a Fabri-Pero interferometer. Stability analysis of the thermo-elastic dynamical system equilibrium configuration reveals existence of a complex bifurcation structure (Fig. 2) which includes coexisting bi-stable solutions between snaddle-node pairs, and flutter thresholds that correspond to saddle-node and Hopf bifurcations, respectively.

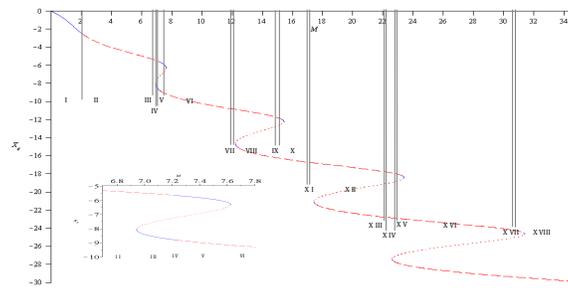


Figure 2: Bifurcation diagram of equilibrium as a function of input power (solid-stable, dashed-unstable).

A numerical analysis of system response exhibits free vibration decay (Fig. 3 left) below the Hopf threshold in region I of Figure 2, self-excited vibrations (Fig. 3 center) for the low power input documented by [1] in region II of Figure 2, and possible irregular chaotic jumps (Fig. 3 right) between coexisting bi-stable solutions in region V of Figure 2.

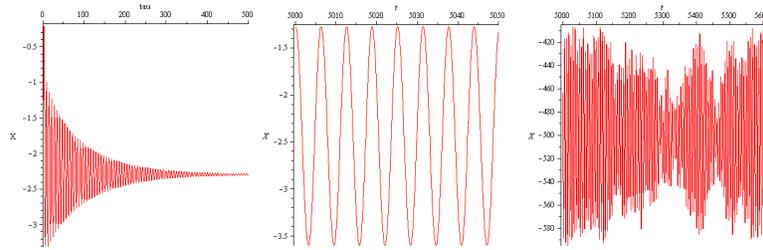


Figure 3: Cantilever tip time-series response: free decay (left) below the first Hopf threshold, periodic limit-cycle motion above the first Hopf threshold (center), and non-stationary response above the first bi-stable transition (right).

Investigation of system periodicity via sampling of the non-dimensional displacement ( $X$ ) and temperature ( $Z$ ) response intersection with the zero velocity plane ( $Y=0$ ), yields a bifurcation diagram of Poincare' points for various values of input power (Fig. 4 left). The bifurcation structure reveals a period-doubling mechanism ( $M \sim 15$ ) which culminates with a strange attractor ( $M \sim 15.5$ ) which is then destroyed via a reverse bifurcation ( $M \sim 16$ ).

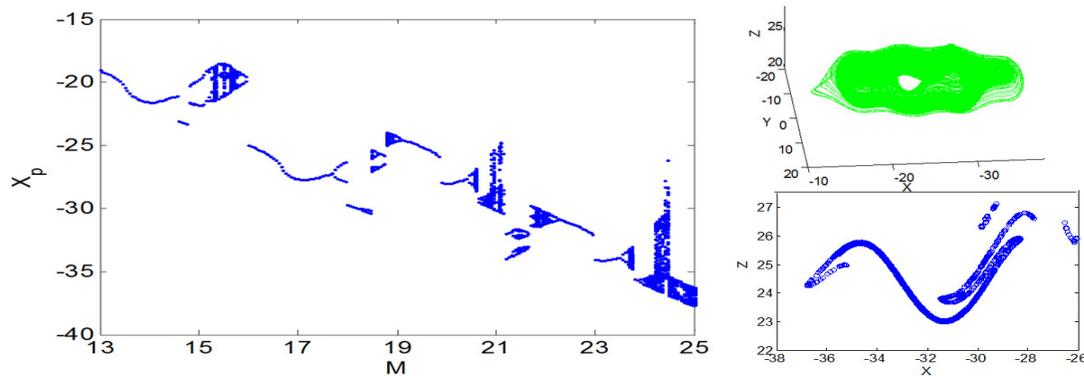


Figure 4: A bifurcation diagram ( $M$ ) depicting the displacement Poincare' points ( $X_p$ ) for increasing laser intensity ( $M$ ) spanning regions VII to XVI in Figure 2. A three dimensional chaotic state-space (upper right) and fractal Poincare' map projection (lower right) for a selected intensity in region XVI of Figure 2 ( $M=24.4$ ).

An example chaotic strange attractor ( $M=24.4$ ) is depicted (Fig. 4 upper right) via its three dimensional state-space [ $Z(X,Y)$ ] and (Fig. 4 lower right) Poincare' map projection [ $Z(X)$ ] which exhibits a distinct fractal behavior that includes both stretch and fold properties.

This numerical investigation enables a quantitative description of a complex multiple-mode bifurcation structure that includes coexisting equilibrium solutions, self-excited periodic oscillations, quasiperiodic solutions due to a 3:1 internal resonance between the third and second modes, and chaotic structural response of the thermo-visco-elastic dynamical system that is subject to laser irradiation.

[1] Hane, K. and Suzuki, K., *Sensors and Actuators A* 51, 179-181, 1996.  
 [2] Aubin, K. et al, *J. Microelectromechanical Systems*, 13, 1018-1026, 2003.  
 [3] Gottlieb, O. and Champneys, A.R., in *Solid Mechanics and its Applications* vol. 122, eds. Rega G. and Vestroni. F., Springer, 117-126, 2005.  
 [4] Hornstein, S. and Gottlieb, O., *Nonlinear Dynamics*, 54, 93-122, 2008.  
 [5] Lenci, S. and Rega, G., *J. Micromechanics and Microengineering*, 16, 390-401, 2006.